



ZELEKTRİK
Lighting Solutions
2023

www.zelektrik.com

Table of Products



Down Light – Page 3



Spot Light – Page 6



Track Light – Page 7



Panel Light – Page 8



Linear Light -Page 10



Decorative Light – Page 12



Industrial Light – Page 15



High Bay Light – Page 17



Flood Light – Page 19



Street Light – Page 20



Facade Light – Page 22



Inground Lighting – Page 26



ZELEKTRİK has wide experience in developing, manufacturing and supplying of lighting products and solutions to our customers around the world. Our high-quality products are the result of our proper selection of raw materials, production machines, quality control, and testing of the products during and after the manufacturing process.

We don't offer only high-quality lighting products but also, we add value to our customers in terms of technical support, satisfaction, price, lead time, shipping cost, and best COO for less custom duty, which makes our proposal the best deal.



Product Description	Benefits	Applications
<ul style="list-style-type: none"> ✓ Aluminum injection body and heatsink. ✓ Electrostatic powder coating. ✓ Aluminum Reflector / Clear PMMA Cover. ✓ Excellent heat dissipation design and materials. 	<ul style="list-style-type: none"> ✓ Saves 50% energy. ✓ Heavy duty design. ✓ L70 >50,000 Hrs. ✓ High efficiency lenses. 	<ul style="list-style-type: none"> ✓ Hotels. ✓ Offices. ✓ Residential. ✓ Shopping Malls.



Specifications

Product Code	30111	30112	30113	30114
Wattage (W)	9	12	15	18
Luminous Flux (Lm)	1080	1140	1800	2160
Color Temperature	2700 K – 6500 K			
Efficiency	120 Lm/W			
Beam Angle	24°, 40°, 60°			
Supply	220 – 240 VAC, 50Hz			
Operating Temp.	-20 °C to +40 °C			
Light Source	COB (Osram / Samsung)			
Driver	Flicker Free (Tridonic)			
Dimension (mm)	Φ88×70	Φ100×77	Φ110×85	Φ135×103
Cut Out (mm)	Φ75	Φ90	Φ100	Φ125



Specifications

Product Code	30121	30122	30123
Wattage (W)	20	35	40
Luminous Flux (Lm)	2400	4200	4800
Color Temperature	2700 K – 6500 K		
Efficiency	120 Lm/W		
Beam Angle	24°, 40°, 60°		
Supply	220 – 240 VAC, 50Hz		
Operating Temp.	-20 °C to +40 °C		
Light Source	COB (Osram / Samsung)		
Driver	Flicker Free (Tridonic)		
Dimension (mm)	Φ110×85	Φ135×103	Φ165×120
Cut Out (mm)	Φ100	Φ125	Φ150



Product Description	Benefits	Applications
<ul style="list-style-type: none"> ✓ Aluminum injection body and heatsink. ✓ Electrostatic powder coating. ✓ Diffuser Polycarbonate / Polystyrene. ✓ Excellent heat dissipation design and materials. 	<ul style="list-style-type: none"> ✓ Saves 50% energy. ✓ Heavy duty design. ✓ L70 >50,000 Hrs. 	<ul style="list-style-type: none"> ✓ Hotels. ✓ Offices. ✓ Residential. ✓ Stores. ✓ Galleries.



Specifications				
Product Code	30131	30132	30133	30134
Wattage (W)	10	15	20	30
Luminous Flux (Lm)	1044	1402	2325	3235
Color Temperature	2700 K – 6500 K			
Efficiency	104 Lm/W	94 Lm/W	116 Lm/W	109 Lm/W
Beam Angle	110°			
Supply	220 – 240 VAC, 50Hz			
Operating Temp.	-20 °C to +40 °C			
Light Source	COB (Osram / Samsung)			
Driver	Flicker Free (Tridonic)			
Dimension (mm)	Φ95×42	Φ127×46	Φ194×58	Φ222.5×54.5
Cut Out (mm)	Φ73-80	Φ97-108	Φ161-175	Φ193-207

IP
20

Specifications						
Product Code	30141	30142	30143	30144	30145	30146
Wattage (W)	3	6	9	12	15	18
Luminous Flux (Lm)	263	506	746	1008	1310	1555
Color Temperature	2700 K – 6500 K					
Efficiency (Lm/W)	88	84	83	84	87	86
Beam Angle	110°					
Supply	220 – 240 VAC, 50Hz					
Operating Temp.	-20 °C to +40 °C					
Light Source	COB (Osram / Samsung)					
Driver	Flicker Free (Tridonic)					
Dimension (mm)	Φ85 ×10	Φ120 ×10	Φ145 ×10	Φ174 ×10	Φ200 ×10	Φ225 ×10
Cut Out (mm)	Φ74	Φ106	Φ134	Φ154	Φ182	Φ205
Product Code						
Dimension (mm)	85x85 ×10	120x120 ×10	145x145 ×10	174x174 ×10	200x200 ×10	225x225 ×10
Cut Out (mm)	74x74	106x106	134x134	154x154	182x182	205x205



Product Description	Benefits	Applications
✓ Aluminum injection body and heatsink.	✓ Saves 50% energy.	✓ Hotels.
✓ Electrostatic powder coating.	✓ Heavy duty design.	✓ Offices.
✓ Aluminum Reflector / Clear PMMA Cover.	✓ L70 >50,000 Hrs.	✓ Stores.
✓ Excellent heat dissipation design and materials.	✓ High efficiency lenses.	✓ Galleries.
		✓ Shopping Malls.



Specifications

Product Code	30151	30152	30153	30154
Wattage (W)	10	15	25	30
Luminous Flux (Lm)	1200lm	1800lm	3000lm	3600lm
Color Temperature	2700 K – 6500 K			
Efficiency	120 Lm/W			
Beam Angle	24°, 40°, 60°			
Supply	220 – 240 VAC, 50Hz			
Operating Temp.	-20 °C to +40 °C			
Light Source	COB (Osram / Samsung)			
Driver	Flicker Free (Tridonic)			
Dimension (mm)	116x116x90	144x144x110	164x164x113	184x184x115
Cut Out (mm)	100x100	125x125	145x145	165x165



Specifications

Product Code	30161	30162	30163	30164
Wattage (W)	2x10	2x15	2x25	2x30
Luminous Flux (Lm)	2400lm	3600lm	6000lm	7200lm
Color Temperature	2700 K – 6500 K			
Efficiency	120 Lm/W			
Beam Angle	24°, 40°, 60°			
Supply	220 – 240 VAC, 50Hz			
Operating Temp.	-20 °C to +40 °C			
Light Source	COB (Osram / Samsung)			
Driver	Flicker Free (Tridonic)			
Dimension (mm)	116x222x90	144x272x110	164x313x113	184x184x354
Cut Out (mm)	100x200	125x250	145x290	165x330



Product Description	Benefits	Applications
<ul style="list-style-type: none"> ✓ Aluminum injection body and heatsink. ✓ Electrostatic powder coating. ✓ Aluminum Reflector / Clear PMMA Cover. ✓ Excellent heat dissipation design and materials. 	<ul style="list-style-type: none"> ✓ Saves 50% energy. ✓ Heavy duty design. ✓ L70 >50,000 Hrs. ✓ High efficiency lenses. 	<ul style="list-style-type: none"> ✓ Hotels. ✓ Stores. ✓ Galleries. ✓ Shopping Malls. ✓ Exhibition Halls.



Specifications		
Product Code	30211	30212
Wattage (W)	12	25
Luminous Flux (Lm)	1440 Lm	3000 Lm
Color Temperature	2700 K – 6500 K	
Efficiency	120 Lm/W	
Beam Angle	15°, 24°, 40°, 60°	
Supply	220 – 240 VAC, 50Hz	
Operating Temp.	-20 °C to +40 °C	
Light Source	COB (Osram / Samsung)	
Driver	Flicker Free (Tridonic)	
Dimension (mm)	100×100×112	130×130×112
Cut Out (mm)	Φ90	Φ120



Specifications		
Product Code	30221	30222
Wattage (W)	2x12	2x25
Luminous Flux (Lm)	2880 Lm	6000 Lm
Color Temperature	2700 K – 6500 K	
Efficiency	120 Lm/W	
Beam Angle	15°, 24°, 40°, 60°	
Supply	220 – 240 VAC, 50Hz	
Operating Temp.	-20 °C to +40 °C	
Light Source	COB (Osram / Samsung)	
Driver	Flicker Free (Tridonic)	
Dimension (mm)	185×100×112	130×240×138
Cut Out (mm)	175×90	230×120



Product Description	Benefits	Applications
<ul style="list-style-type: none"> ✓ Aluminum extrusion body and heatsink. ✓ Electrostatic powder coating. ✓ Aluminum Reflector / Clear PMMA Cover. ✓ Excellent heat dissipation design and materials. 	<ul style="list-style-type: none"> ✓ Saves 50% energy. ✓ Heavy duty design. ✓ L70 >50,000 Hrs. ✓ High efficiency lenses. 	<ul style="list-style-type: none"> ✓ Hotels. ✓ Stores. ✓ Galleries. ✓ Shopping Malls. ✓ Exhibition Halls.

CRI >80	UGR <19	DALI	0-10V	5 Years Warranty	CE	TSE	EN 60598-1	EN 62471	IEC TR 62778
							EN 62031	IEC 62722-2-1	EN 60598-2-2
									IP 40
									IK 02

Specifications			
Product Code	30311	30312	30313
Wattage (W)	10	20	30
Luminous Flux (Lm)	1200	2400	3600
Color Temperature	2700 K – 6500 K		
Efficiency	120 Lm/W		
Beam Angle	15°, 24°, 40°, 60°		
Supply	220 – 240 VAC, 50Hz		
Operating Temp.	-20 °C to +40 °C		
Light Source	COB (Osram / Samsung)		
Driver	Flicker Free (Tridonic)		
Diming Options	DALI / Dim Switch		
Dimension (mm)	Φ125×130	Φ125×130	Φ125×130



Specifications			
Product Code	30321	30322	30323
Wattage (W)	20	30	40
Luminous Flux (Lm)	2400	3600	4800
Color Temperature	2700 K – 6500 K		
Efficiency	120 Lm/W		
Beam Angle	15°, 30°, 45°		
Supply	220 – 240 VAC, 50Hz		
Operating Temp.	-20 °C to +40 °C		
Light Source	COB (Osram / Samsung)		
Driver	Flicker Free (Tridonic)		
Diming Options	DALI / Dim Switch		
Dimension (mm)	Φ125×150	Φ125×150	Φ125×150




Product Description	Benefits	Applications
<ul style="list-style-type: none"> ✓ Aluminum injection body and heatsink. ✓ Electrostatic powder coating. ✓ High transmission PMMA opal cover with UV protection. ✓ Excellent heat dissipation design and materials. 	<ul style="list-style-type: none"> ✓ Saves 50% energy. ✓ Heavy duty design. ✓ L70 >50,000 Hrs. 	<ul style="list-style-type: none"> ✓ Hotels. ✓ Hospitals. ✓ Offices. ✓ Schools. ✓ Kitchens.



Specifications

Product Code	30411	30412	30413	30414
Wattage (W)	18	24	36	63
Luminous Flux (Lm)	2160	2880	4320	7560
Color Temperature	2700 K – 6500 K			
Efficiency	120 Lm/W			
Beam Angle	120°			
Supply	220 – 240 VAC, 50Hz			
Operating Temp.	-20 °C to +40 °C			
Light Source	SMD (Osram / Samsung)			
Driver	Flicker Free (Tridonic)			
Dimension (mm)	595x595x35	595x595x35	595x595x35	595x1195x35
Cut Out (mm)	575x575	575x575	575x575	575x1175

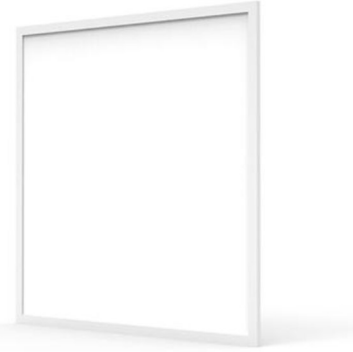

Specifications

Product Code	30421	30422
Wattage (W)	36	50
Luminous Flux (Lm)	5040	7000
Color Temperature	3000 K – 6500 K	
Efficiency	140 Lm/W	
Beam Angle	120°	
Supply	220 – 240 VAC, 50Hz	
Operating Temp.	-20 °C to +40 °C	
Light Source	SMD (Osram / Samsung)	
Driver	Flicker Free (Tridonic)	
Dimension (mm)	595x595x100	595x1195x100



Product Description	Benefits	Applications
<ul style="list-style-type: none"> ✓ Metal Sheet body and heatsink. ✓ Electrostatic powder coating. ✓ High transmission PMMA opal cover with UV protection. ✓ Excellent heat dissipation design and materials. 	<ul style="list-style-type: none"> ✓ Saves 50% energy. ✓ Heavy duty design. ✓ L70 >50,000 Hrs. ✓ High efficiency lenses. 	<ul style="list-style-type: none"> ✓ Hotels. ✓ Hospitals. ✓ Offices. ✓ Schools. ✓ Kitchens.



Specifications		
Product Code	30431	30432
Wattage (W)	36	50
Luminous Flux (Lm)	5040	7000
Color Temperature	3000 K – 6500 K	
Efficiency	140 Lm/W	
Beam Angle	60°, 90°	
Supply	220 – 240 VAC, 50Hz	
Operating Temp.	-20 °C to +40 °C	
Light Source	SMD (Osram / Samsung)	
Driver	Flicker Free (Tridonic)	
Dimension (mm)	595x595x100	595x1195x100



Specifications		
Product Code	30441	30442
Wattage (W)	36	50
Luminous Flux (Lm)	5040	7000
Color Temperature	3000 K – 6500 K	
Efficiency	140 Lm/W	
Beam Angle	50°, 80°	
Supply	220 – 240 VAC, 50Hz	
Operating Temp.	-20 °C to +40 °C	
Light Source	SMD (Osram / Samsung)	
Driver	Flicker Free (Tridonic)	
Dimension (mm)	595x595x100	595x1195x100




Product Description	Benefits	Applications
<ul style="list-style-type: none"> ✓ Aluminum extrusion profile. ✓ Electrostatic powder coating. ✓ High transmission PC diffuser with UV protection. ✓ Excellent heat dissipation design and materials. 	<ul style="list-style-type: none"> ✓ Saves 50% energy. ✓ Heavy duty design. ✓ L70 >50,000 Hrs. 	<ul style="list-style-type: none"> ✓ Hotels. ✓ Stores. ✓ Galleries. ✓ Shopping Malls. ✓ Exhibition Halls.



Specifications

Product Code	30511	30512	30513	30514
Wattage (W)	24	38	56	72
Luminous Flux (Lm)	2880	4560	6720	8640
Color Temperature	2700 K – 6500 K			
Efficiency	120 Lm/W			
Beam Angle	110°			
Supply	220 – 240 VAC, 50Hz			
Operating Temp.	-20 °C to +40 °C			
Light Source	SMD (Osram / Samsung)			
Driver	Flicker Free (Tridonic)			
Dimension (mm)	900x55x86	1500x55x86	2100x55x86	2700x55x86

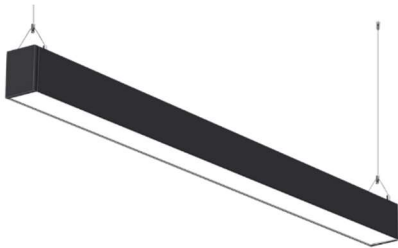

Specifications

Product Code	30521	30522	30523	30524
Wattage (W)	20	40	60	80
Luminous Flux (Lm)	1800	3600	5400	7200
Color Temperature	2700 K – 6500 K			
Efficiency	90 Lm/W			
Beam Angle	110°			
Supply	220 – 240 VAC, 50Hz			
Operating Temp.	-20 °C to +40 °C			
Light Source	SMD (Osram / Samsung)			
Driver	Flicker Free (Tridonic)			
Dimension (mm)	620x72x65	1220x72x65	1820x72x65	2420x72x65



Product Description	Benefits	Applications
<ul style="list-style-type: none"> ✓ Aluminum extrusion profile. ✓ Electrostatic powder coating. ✓ High transmission PC diffuser with UV protection. ✓ Excellent heat dissipation design and materials. 	<ul style="list-style-type: none"> ✓ Saves 50% energy. ✓ Heavy duty design. ✓ L70 >50,000 Hrs. 	<ul style="list-style-type: none"> ✓ Hotels. ✓ Offices. ✓ Stores. ✓ Galleries. ✓ Shopping Malls.



Specifications

Product Code	30531	30532	30533	30534
Wattage (W)	25	42	50	63
Luminous Flux (Lm)	3250	5460	6500	8190
Color Temperature	2700 K – 6500 K			
Efficiency	130 Lm/W			
Beam Angle	120°			
Supply	220 – 240 VAC, 50Hz			
Operating Temp.	-20 °C to +40 °C			
Light Source	SMD (Osram / Samsung)			
Driver	Flicker Free (Tridonic)			
Dimension (mm)	600x101x45	1000x101x45	1200x101x45	1500x101x45
Cut Out (mm)	595x85	995x85	1195x85	1495x85



Specifications

Product Code	30541	30542	30543
Wattage (W)	32	48	64
Luminous Flux (Lm)	4160	6240	8320
Color Temperature	2700 K – 6500 K		
Efficiency	130 Lm/W		
Beam Angle	120°		
Supply	220 – 240 VAC, 50Hz		
Operating Temp.	-20 °C to +40 °C		
Light Source	SMD (Osram / Samsung)		
Driver	Flicker Free (Tridonic)		
Dimension (mm)	1000x80x75	1500x80x75	2000x80x75
Cut Out (mm)	995x75	1495x75	1995x75




Product Description	Benefits	Applications
<ul style="list-style-type: none"> ✓ Aluminum Extrusion and DKP Sheet. ✓ Electrostatic powder coating. ✓ High transmission PC diffuser with UV protection. ✓ Excellent heat dissipation design and materials. 	<ul style="list-style-type: none"> ✓ Saves 50% energy. ✓ Heavy duty design. ✓ L70 >50,000 Hrs. 	<ul style="list-style-type: none"> ✓ Hotels. ✓ Stores. ✓ Galleries. ✓ Shopping Malls.



Specifications

Product Code	30611	30612	30613	30614
Wattage (W)	20	30	38	48
Luminous Flux (Lm)	2,600	3,900	4,940	6,240
Color Temperature	2700 K – 6500 K			
Efficiency	130 Lm/W			
Beam Angle	120°			
Supply	220 – 240 VAC, 50Hz			
Operating Temp.	-20 °C to +40 °C			
Light Source	SMD (Osram / Samsung)			
Driver	Flicker Free (Tridonic)			
Dimension (mm)	200x80x75	300x80x75	400x80x75	500x80x75

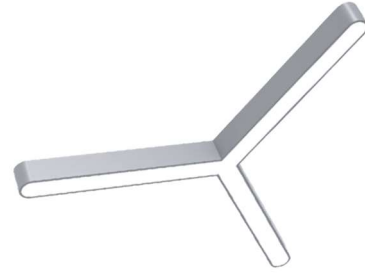

Specifications

Product Code	30621	30622	30623	30624
Wattage (W)	38	45	58	75
Luminous Flux (Lm)	5,000	5,850	7,540	9,750
Color Temperature	2700 K – 6500 K			
Efficiency	130 Lm/W			
Beam Angle	120°			
Supply	220 – 240 VAC, 50Hz			
Operating Temp.	-20 °C to +40 °C			
Light Source	SMD (Osram / Samsung)			
Driver	Flicker Free (Tridonic)			
Dimension (mm)	1000x80x75	1200x80x75	1500x80x75	2000x80x75





Product Description	Benefits	Applications
<ul style="list-style-type: none"> ✓ Aluminum Extrusion and DKP Sheet. ✓ Electrostatic powder coating. ✓ High transmission PC diffuser with UV protection. ✓ Excellent heat dissipation design and materials. 	<ul style="list-style-type: none"> ✓ Saves 50% energy. ✓ Heavy duty design. ✓ L70 >50,000 Hrs. 	<ul style="list-style-type: none"> ✓ Hotels. ✓ Stores. ✓ Galleries. ✓ Shopping Malls. ✓ Exhibition Halls.




Specifications

Product Code	30631	30632	30633	30634	30635
Wattage (W)	38	48	58	67	76
Luminous Flux (Lm)	4,750	6,000	7,250	8,375	9,500
Color Temperature	2700 K – 6500 K				
Efficiency	125 Lm/W				
Beam Angle	120°				
Supply	220 – 240 VAC, 50Hz				
Operating Temp.	-20 °C to +40 °C				
Light Source	SMD (Osram / Samsung)				
Driver	Flicker Free (Tridonic)				
Dimension (mm)	400x50x85	500x50x85	600x50x85	700x50x85	800x50x85



Specifications

Product Code	30641	30642	30643	30644	30645
Wattage (W)	39	48	61	70	80
Luminous Flux (Lm)	4,875	6,000	7,625	8,750	10,000
Color Temperature	2700 K – 6500 K				
Efficiency	125 Lm/W				
Beam Angle	120°				
Supply	220 – 240 VAC, 50Hz				
Operating Temp.	-20 °C to +40 °C				
Light Source	SMD (Osram / Samsung)				
Driver	Flicker Free (Tridonic)				
Dimension (mm)	Φ500x50x85	Φ600x50x85	Φ700x50x85	Φ800x50x85	Φ900x50x85

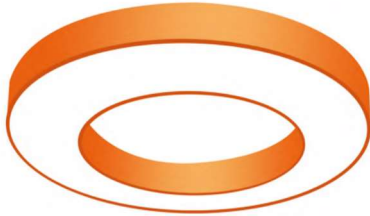





Product Description	Benefits	Applications
<ul style="list-style-type: none"> ✓ Aluminum Extrusion and DKP Sheet. ✓ Electrostatic powder coating. ✓ High transmission PC diffuser with UV protection. ✓ Excellent heat dissipation design and materials. 	<ul style="list-style-type: none"> ✓ Saves 50% energy. ✓ Heavy duty design. ✓ L70 >50,000 Hrs. 	<ul style="list-style-type: none"> ✓ Hotels. ✓ Stores. ✓ Galleries. ✓ Shopping Malls. ✓ Exhibition Halls.



Specifications

Product Code	30651	30652	30653	30654
Wattage (W)	33	50	67	84
Luminous Flux (Lm)	4,125	6,250	8,375	10,500
Color Temperature	2700 K – 6500 K			
Efficiency	125 Lm/W			
Beam Angle	120°			
Supply	220 – 240 VAC, 50Hz			
Operating Temp.	-20 °C to +40 °C			
Light Source	SMD (Osram / Samsung)			
Driver	Flicker Free (Tridonic)			
Dimension (mm)	400x400x85	600x600x85	800x800x85	1000x1000x85

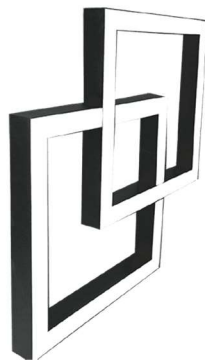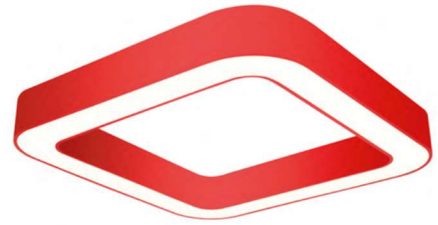

Specifications

Product Code	30661	30662	30663
Wattage (W)	30	40	60
Luminous Flux (Lm)	3,750	5,000	7,500
Color Temperature	2700 K – 6500 K		
Efficiency	125 Lm/W		
Beam Angle	120°		
Supply	220 – 240 VAC, 50Hz		
Operating Temp.	-20 °C to +40 °C		
Light Source	SMD (Osram / Samsung)		
Driver	Flicker Free (Tridonic)		
Dimension (mm)	400x55x85	600x55x85	800x55x85



Product Description	Benefits	Applications
<ul style="list-style-type: none"> ✓ Aluminum Frame and PC Cover, . ✓ Electrostatic powder coating. ✓ Wall, suspended or surface mounted are available. ✓ Excellent heat dissipation design and materials. 	<ul style="list-style-type: none"> ✓ Saves 50% energy. ✓ Heavy duty design. ✓ L70 >50,000 Hrs. 	<ul style="list-style-type: none"> ✓ Stores. ✓ Factories. ✓ Warehouses. ✓ Parking.



Specifications

Product Code	30711	30712	30713	30714
Wattage (W)	60	80	100	150
Luminous Flux (Lm)	9,000	12,000	15,000	22,500
Color Temperature	3000 K – 6500 K			
Efficiency	150 Lm/W			
Beam Angle	120°			
Supply	220 – 240 VAC, 50Hz			
Operating Temp.	-30 °C to +50 °C			
Light Source	SMD (Osram / Samsung)			
Driver	Flicker Free (Tridonic)			
Dimension (mm)	600x150x68	600x150x68	900x150x68	1200x150x68



Specifications

Product Code	30721	30722	30723	30724
Wattage (W)	30	40	50	60
Luminous Flux (Lm)	4,500	6,000	7,500	9,000
Color Temperature	3000 K – 6500 K			
Efficiency	150 Lm/W			
Beam Angle	120°			
Supply	220 – 240 VAC, 50Hz			
Operating Temp.	-30 °C to +50 °C			
Light Source	SMD (Osram / Samsung)			
Driver	Flicker Free (Tridonic)			
Dimension (mm)	600x90x74	900x90x74	1200x90x74	1500x90x74



Product Description	Benefits	Applications
<ul style="list-style-type: none"> ✓ Fireproof PC material with perfect impact-resistance. ✓ PC Cover Color Options: Milk, Transparent, and Strip. ✓ Excellent heat dissipation design and materials. 	<ul style="list-style-type: none"> ✓ Saves 50% energy. ✓ Heavy duty design. ✓ L70 >50,000 Hrs. 	<ul style="list-style-type: none"> ✓ Stores. ✓ Galleries. ✓ Shopping Malls. ✓ Exhibition Halls.



Specifications

Product Code	30731	30732	30733
Wattage (W)	20	40	50
Luminous Flux (Lm)	2600	5200	6500
Color Temperature	3000 K – 6000 K		
Efficiency	130 Lm/W		
Beam Angle	120°		
Supply	220 – 240 VAC, 50Hz		
Operating Temp.	-30 °C to +50 °C		
Light Source	SMD (Osram / Samsung)		
Driver	Flicker Free (Tridonic)		
Dimension (mm)	600x95x85	1200x95x85	1500x95x85



Specifications

Product Code	30741	30742	30743	30744
Wattage (W)	19	27	37	53
Luminous Flux (Lm)	2,375	3,375	4,625	6,625
Color Temperature	2700 K – 6500 K			
Efficiency	125 Lm/W			
Beam Angle	120°			
Supply	220 – 240 VAC, 50Hz			
Operating Temp.	-30 °C to +50 °C			
Light Source	SMD (Osram / Samsung)			
Driver	Flicker Free (Tridonic)			
Dimension (mm)	624x52x92	935x52x92	1220x52x92	1527x52x92



Product Description	Benefits	Applications
✓ Aluminum frame and PC Cover.	✓ Saves 50% energy.	✓ Stores.
✓ Electrostatic powder coating.	✓ Heavy duty design.	✓ Factories.
✓ Wall, suspended or surface mounted are available.	✓ L70 >50,000 Hrs.	✓ Warehouses.
✓ Excellent heat dissipation design and materials.	✓ High efficiency lenses.	✓ Parking.



Specifications

Product Code	30811	30812	30813	30814	30815
Wattage (W)	60	80	100	150	200
Color Temperature)	3000K, 4000K, 5000K, 5700K, 6500K				
Luminous Flux (Lm)	9,600	12,800	16,000	24,000	32,000
Efficiency	160 Lm/W				
Beam Angle	120°				
Supply	220 – 240 VAC, 50Hz				
Operating Temp.	-30 °C to +50 °C				
Light Source	SMD (Osram / Samsung)				
Driver	Flicker Free (Tridonic)				
Dimension (mm)	600x150x68	600x150x68	900x150x68	1200x150x68	1500x150x68





Product Description	Benefits	Applications
<ul style="list-style-type: none"> ✓ Aluminum extrusion housing, and PC lens. ✓ Electrostatic powder coating. ✓ High transmission PC diffuser with UV protection. ✓ Excellent heat dissipation design and materials. 	<ul style="list-style-type: none"> ✓ Saves 50% energy. ✓ Heavy duty design. ✓ L70 >50,000 Hrs. ✓ High efficiency lenses. 	<ul style="list-style-type: none"> ✓ Stores. ✓ Factories. ✓ Warehouses.



Specifications

Product Code	30821	30822	30823
Wattage (W)	100	150	200
Luminous Flux (Lm)	15,000	22,500	30,000
Color Temperature	3000 K – 6000 K		
Efficiency	150 Lm/W		
Beam Angle	60°, 90°, 120°		
Supply	220 – 240 VAC, 50Hz		
Operating Temp.	-30 °C to +50 °C		
Light Source	SMD (Osram / Samsung)		
Driver	Flicker Free (Tridonic)		
Dimension (mm)	Φ240x144	Φ285x152	Φ285x152



Specifications

Product Code	30831	30832	30833	30834
Wattage (W)	100	150	200	240
Luminous Flux (Lm)	19,000	28,500	38,000	45,600
Color Temperature	2700 K – 6500 K			
Efficiency	190 Lm/W			
Beam Angle	60°, 90°, 120°			
Supply	220 – 240 VAC, 50Hz			
Operating Temp.	-30 °C to +50 °C			
Light Source	SMD (Osram / Samsung)			
Driver	Flicker Free (Tridonic)			
Dimension (mm)	Φ262x175	Φ301x175	Φ350x175	Φ350x175



Product Description	Benefits	Applications
✓ Aluminum injection housing, and tempered glass.	✓ Saves 50% energy.	✓ Stores.
✓ Electrostatic powder coating.	✓ Heavy duty design.	✓ Factories.
✓ High efficiency Glass & Lenses.	✓ L70 >50,000 Hrs.	✓ Warehouses.
✓ Excellent heat dissipation design and materials.	✓ High efficiency lenses.	

**Specifications**

Product Code	30911	30912	30913	30914	30915
Wattage (W)	50	80	100	150	200
Luminous Flux (Lm)	7,500	12,000	15,000	22,500	30,000
Color Temperature	3000 K – 6000 K				
Efficiency	150 Lm/W				
Beam Angle	60°, 90°, 120°				
Supply	220 – 240 VAC, 50Hz				
Operating Temp.	-30 °C to +50 °C				
Light Source	SMD (Osram / Samsung)				
Driver	Flicker Free (Tridonic)				
Dimension (mm)	177x165x25	205x197x28	302x257x30	382x348x30	382x348x30

**Specifications**

Product Code	30921	30922	30923	30924	30925
Wattage (W)	50	80	100	150	200
Luminous Flux (Lm)	6,500	10,400	13,000	19,500	26,000
Color Temperature					
Efficiency	130 Lm/W				
Beam Angle	60°, 90°, 120°				
Supply	220 – 240 VAC, 50Hz				
Operating Temp.	-30 °C to +50 °C				
Light Source	SMD (Osram / Samsung)				
Driver	Flicker Free (Tridonic)				
Dimension (mm)	190x140x35	250x180x40	330x240x46	330x240x46	400x300x48




Product Description	Benefits	Applications
<ul style="list-style-type: none"> ✓ High-quality Die-casting aluminum housing, 5mm thickness safety glass, and silicone rubber gasket. ✓ Supplied with 10KV surge protection and a reserved space for CMS controllers. ✓ Excellent heat dissipation design and materials. ✓ 10 years warranty. 	<ul style="list-style-type: none"> ✓ Saves 50% energy. ✓ Heavy duty design. ✓ L70 >100,000 Hrs. ✓ High efficiency lenses.. 	<ul style="list-style-type: none"> ✓ Motorways ✓ Highway ✓ Streetlights ✓ Outdoor Areas



Specifications						
Product Code	31011	31012	31013	31014	31015	31016
Wattage (W)	60	100	150	200	240	300
Luminous Flux (Lm)	9,600	16,000	24,000	32,000	38,400	48,000
Color Temperature	3000 K – 5700 K					
Efficiency	160 Lm/W					
Beam Angle	Type I, Type II, Type III, Type IV					
Supply	220 – 240 VAC, 50Hz					
Operating Temp.	-30 °C to +50 °C					
Light Source	SMD (Osram / Samsung)					
Driver	Flicker Free (Tridonic)					
Dimension (mm)	580x240x149	580x240x149	740x344x149	740x344x149	835x400x149	835x400x149



Product Description	Benefits	Applications
<ul style="list-style-type: none"> ✓ High-quality Die-casting aluminum housing, 5mm thickness safety glass, and silicone rubber gasket. ✓ Supplied with 10KV surge protection and a reserved space for CMS controllers. ✓ Excellent heat dissipation design and materials. 	<ul style="list-style-type: none"> ✓ Saves 50% energy. ✓ Heavy duty design. ✓ L70 >50,000 Hrs. ✓ High efficiency lenses. 	<ul style="list-style-type: none"> ✓ Motorways ✓ Highway ✓ Streetlights ✓ Outdoor Areas

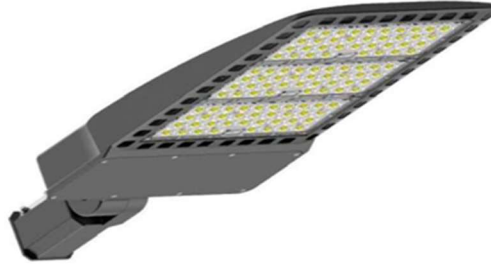

Specifications						
Product Code	31011	31012	31013	31014	31015	31016
Wattage (W)	60	100	150	200	240	300
Luminous Flux (Lm)	8,400	14,000	21,000	28,000	33,600	42,000
Color Temperature	3000 K – 5700 K					
Efficiency	140 Lm/W					
Beam Angle	150x80°					
Supply	220 – 240 VAC, 50Hz					
Operating Temp.	-30 °C to +50 °C					
Light Source	SMD (Osram / Samsung)					
Driver	Flicker Free (Tridonic)					
Dimension (mm)	580x240x149	580x240x149	740x344x149	740x344x149	835x400x149	835x400x149



Product Description	Benefits	Applications
✓ 6063 Aluminum alloy lamp body and tempered glass.	✓ Saves 50% energy.	✓ Shopping Malls
✓ Monochrome/RGB Three in one / RGBW 4 in one for options.	✓ Heavy duty design.	✓ Hotels
✓ Support DMX512 control system automatic addressing	✓ L70 >50,000 Hrs.	✓ Bridges
✓ Excellent heat dissipation design and materials.	✓ High efficiency lenses.	✓ Building Facade
		✓ Landscape



Specifications

Product Code	31111	31112	31113	31114	31115	31116
Wattage (W)	18	24	36	36	36	48
Color Temperature	3000K/DMX	3000K/DMX	3000K/DMX	RGB	RGBW	RGB
Beam Angle	10°, 15°, 30°, 45°, 60°, 10x60°, 20x45°					
Supply	220 – 240 VAC, 50Hz					
Operating Temp.	-30 °C to +50 °C					
Light Source	SMD (Osram / Samsung)					
Driver	Flicker Free (Tridonic)					
Dimension (mm)	1000x36x68					



Specifications

Product Code	31121	31122	31123	31124	31125	31126
Wattage (W)	18	24	36	48	36	54
Color Temperature	3000K/DMX	3000K/DMX	RGB	RGBW	3000K/DMX	RGB
Beam Angle	10°, 15°, 30°, 45°, 60°, 10x60°, 20x45°					
Supply	24-42VDC/110-270VAC, 50Hz					
Operating Temp.	-30 °C to +50 °C					
Light Source	SMD (Osram / Samsung)					
Driver	Flicker Free (Tridonic)					
Dimension (mm)	Φ231x209	Φ231x209	Φ231x209	Φ231x209	Φ281x253	Φ281x253



Product Description	Benefits	Applications
<ul style="list-style-type: none"> ✓ High corrosion-resistant die-cast aluminum for excellent heat dissipation with high-definition tempered glass. ✓ Rotary mounting base for easy adjustment of the projection angle. ✓ Excellent heat dissipation design and materials. 	<ul style="list-style-type: none"> ✓ Saves 50% energy. ✓ Heavy duty design. ✓ L70 >50,000 Hrs. ✓ High efficiency lenses. 	<ul style="list-style-type: none"> ✓ Shopping Malls ✓ Hotels ✓ Bridges ✓ Building Facade ✓ Landscape



Specifications

Product Code	31131	31132	31133
Wattage (W)	18	36	60
Luminous Flux (Lm)	1,800	3,600	6,000
Color Temperature	2200K-7000K, RGB		
Efficiency	100 Lm/W		
Beam Angle	8°, 15°, 30°, 45°, 60°		
Supply	24-42VDC/110-270VAC, 50Hz		
Operating Temp.	-30 °C to +50 °C		
Light Source	SMD (Osram / Samsung)		
Driver	Flicker Free (Tridonic)		
Dimension (mm)	Φ140x69		



Specifications

Product Code	31141	31142
Wattage (W)	36	60
Luminous Flux (Lm)	3,600	6,000
Color Temperature	2200K-7000K, RGB	
Efficiency	100 Lm/W	
Beam Angle	8°, 15°, 30°, 45°, 60°	
Supply	24-42VDC/110-270VAC, 50Hz	
Operating Temp.	-30 °C to +50 °C	
Light Source	SMD (Osram / Samsung)	
Driver	Flicker Free (Tridonic)	
Dimension (mm)	Φ190x130	Φ230x165



Product Description	Benefits	Applications
<ul style="list-style-type: none"> ✓ ADC12 Die-casting Aluminum, Tempered glass. ✓ Temperature-resistant, high permeability, flame-retardant optical lens, with external anti-glare cover, minimize glare and stray light. ✓ Excellent heat dissipation design and materials. 	<ul style="list-style-type: none"> ✓ Saves 50% energy. ✓ Heavy duty design. ✓ L70 >50,000 Hrs. ✓ High efficiency lenses. 	<ul style="list-style-type: none"> ✓ Shopping Malls ✓ Hotels ✓ Bridges ✓ Building Facade ✓ Landscape



Specifications			
Product Code	31151	31152	31153
Wattage (W)	2x7	2x12	2x14
Luminous Flux (Lm)	1,260	2,160	2,520
Color Temperature	3000 K – 5700 K		
Efficiency	90 Lm/W		
Beam Angle	20°, 30°, 40°		
Supply	220 – 240 VAC, 50Hz		
Operating Temp.	-30 °C to +50 °C		
Light Source	SMD (Osram / Samsung)		
Driver	Flicker Free (Tridonic)		
Dimension (mm)	Ø65x168		



Specifications		
Product Code	31161	31162
Wattage (W)	10	15
Luminous Flux (Lm)	1,000	1,500
Color Temperature	2200K-7000K, RGB	
Efficiency	100 Lm/W	
Beam Angle	60°	
Supply	110-270VAC, 50Hz	
Operating Temp.	-30 °C to +50 °C	
Light Source	SMD (Osram / Samsung)	
Driver	Flicker Free (Tridonic)	
Dimension (mm)	271x142	



Product Description	Benefits	Applications
<ul style="list-style-type: none"> ✓ ADC12 Die-casting Aluminum, PC cover. ✓ Temperature-resistant, high permeability, with external anti-glare cover, minimize glare and stray light. ✓ Excellent heat dissipation design and materials. 	<ul style="list-style-type: none"> ✓ Saves 50% energy. ✓ Heavy duty design. ✓ L70 >50,000 Hrs. ✓ High efficiency lenses. 	<ul style="list-style-type: none"> ✓ Shopping Malls ✓ Hotels ✓ Bridges ✓ Building Facade ✓ Landscape



Specifications

Product Code	31171	31172	31173
Wattage (W)	15	18	24
Luminous Flux (Lm)	1,350	1,620	2,160
Color Temperature	3000 K – 5700 K		
Efficiency	90 Lm/W		
Beam Angle	105°		
Supply	200 – 240 VAC, 50Hz		
Operating Temp.	-30 °C to +50 °C		
Light Source	SMD (Osram / Samsung)		
Driver	Flicker Free (Tridonic)		
Dimension (mm)	280x188x90		



Specifications

Product Code	31181	31182	31183
Wattage (W)	15	18	24
Luminous Flux (Lm)	1,350	1,620	2,160
Color Temperature	3000 K – 5700 K		
Efficiency	90 Lm/W		
Beam Angle	105°		
Supply	200 – 240 VAC, 50Hz		
Operating Temp.	-30 °C to +50 °C		
Light Source	SMD (Osram / Samsung)		
Driver	Flicker Free (Tridonic)		
Dimension (mm)	Ø276x86		



Product Description	Benefits	Applications
<ul style="list-style-type: none"> ✓ Die-cast aluminum thickened body, 304 stainless steel cover, 8mm tempered glass. ✓ Bevel polarized design, realizing no direct light at short distances, structural waterproof and no glue process. ✓ Monochrome/RGB Three in one / RGBW 4 in in one for options. ✓ Excellent heat dissipation design and materials. 	<ul style="list-style-type: none"> ✓ Saves 50% energy. ✓ Heavy duty design. ✓ L70 >50,000 Hrs. ✓ High efficiency lenses. 	<ul style="list-style-type: none"> ✓ Shopping Malls ✓ Hotels ✓ Bridges ✓ Building Facade ✓ Landscape



Specifications

Product Code	31211	31212	31213	31214	31215
Wattage (W)	9	18	24	36	48
Luminous Flux (Lm)	900	1,800	2,400	3,600	4,800
Color Temperature)	3000K/DMX, RGB, RGBW				
Efficiency	100 Lm/W				
Beam Angle	15°, 30°, 45°, 60°, 10x60°, 20x45°				
Supply	24VDC/220VAC, 50Hz				
Operating Temp.	-30 °C to +50 °C				
Light Source	SMD (Osram / Samsung)				
Driver	Flicker Free (Tridonic)				
Dimension (mm)	Φ120x120	Φ160x137	Φ160x137	Φ200x170	Φ200x170



Specifications

Product Code	31221	31222	31223	31224
Wattage (W)	18	24	36	48
Luminous Flux (Lm)	2,160	2,880	4,320	5,760
Color Temperature)	3000K/DMX, RGB, RGBW			
Efficiency	120 Lm/W			
Beam Angle	15°, 30°, 45°, 60°, 10x60°, 20x45°			
Supply	24VDC/220VAC, 50Hz			
Operating Temp.	-30 °C to +50 °C			
Light Source	SMD (Osram / Samsung)			
Driver	Flicker Free (Tridonic)			
Dimension (mm)	1030x75x84			



Product Description	Benefits	Applications
<ul style="list-style-type: none"> ✓ Body Aluminum Extrusion/ABS T5 / T8 Cap. ✓ Optic Frosted Opac Polycarbonate. ✓ Easy retubing to reduce replacement cost. ✓ Excellent heat dissipation design and materials. 	<ul style="list-style-type: none"> ✓ Saves 50% energy. ✓ Heavy duty design. ✓ L70 >50,000 Hrs. ✓ High efficiency lenses. 	<ul style="list-style-type: none"> ✓ Hotels. ✓ Hospitals. ✓ Offices. ✓ Schools. ✓ Kitchens.



Specifications

Product Code	31301	31302	31303	31311	31312	31313
Cap - Base	T5			T8		
Wattage (W)	9	18	24	9	18	24
Luminous Flux (Lm)	1170	2,340	3,120	1170	2,340	3,120
Color Temperature	3000 K – 6500 K					
Efficiency	130 Lm/W					
Beam Angle	105°					
Supply	200 – 240 VAC, 50Hz					
Operating Temp.	-30 °C to +50 °C					
Light Source	SMD (Osram / Samsung)					
Driver	Isolated - Flicker Free					
Dimension (mm)	600x21	1200x21	1500x21	600x25.8	1200x25.8	1500x25.8





ZELEKTRİK

ZELEKTRİK İÇ VE DIŞ TİCARET LİMİTED ŞİRKETİ

KARAGÜMRÜK MAH. ÇINARLI BOSTAN SK. F2 - 28 - F2 - 29

NO: 14 İÇ KAPI NO: 1 FATİH/ İSTANBUL, TÜRKİYE.

Tel.: +905461000378

Email: info@zelektrik.com

www.zelektrik.com